


IG12232N Graphic 122x32 dots

Dimension drawing

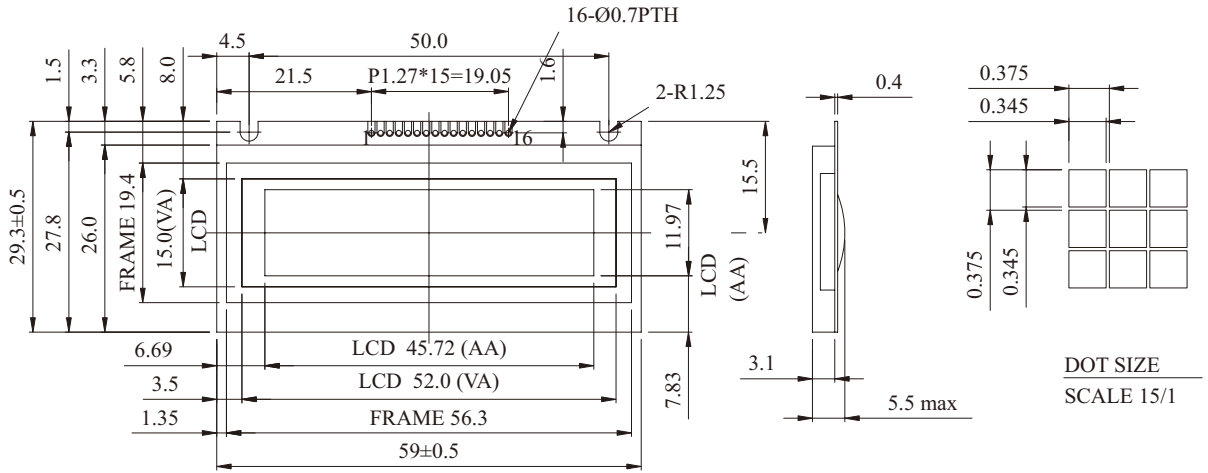

Feature

1. Built-in controller ST7920
2. 1/32 duty cycle
3. N.V. optional for +3.0V power supply
4. Chinese version
5. Same size with IG12232D

Mechanical Data

Item	Standard Value	Unit
Module Dimension	59.0x29.3x5.5	mm
Viewing Area	52.0x15.0	mm
Dot Size	0.345x0.345	mm
Dot Pitch	0.375x0.375	mm

Graphic type

Pin NO.	Symbol	Function
1	VLED	B/L Selected
2	Vss	Ground
3	Vdd	Supply voltage for logic
4	Vo	Operating voltage for LCD
5	RS	H: Date, L: Instruction
6	E	Enable signal
7	VOOUT	Positive Voltage Output
8	DB0	Data bus line
9	DB1	Data bus line
10	DB2	Data bus line
11	DB3	Data bus line
12	DB4	Data bus line
13	DB5	Data bus line
14	DB6	Data bus line
15	DB7	Data bus line
16	R/W	H: read date, L: write date

Absolute Maximum Rating

Item	Symbol	Standard Value			Unit
		min.	typ.	max.	
Power Supply	VDD-VSS	4.75	5.0	5.25	V
Input Voltage	VI	0	---	VDD	V

Note: VSS=0 Volt, VDD=5.0 Volt.

Electrical Characteristics

Item	Symbol	Condition	Standard Value			Unit
			min.	typ.	max.	
Input Voltage	VDD	---	4.5	5.0	5.5	V
Supply Current	IDD	VDD=5V	0.8	1.0	1.5	mA
Recommended LC Driving Voltage for Normal Temp. Version module	VDD-VO	-20°C	---	---	5.8	V
		25°C	---	4.0	---	
		70°C	3.2	---	---	
CCFL Starting Voltage	VFLS	25°C	---	---	---	Vrms
CCFL Driving Voltage	VFLD	25°C	---	---	---	Vrms
CCFL Driving Current	IFLD	VFO=450Vrms 30KHZ	---	---	---	mAms
LED Forward Voltage	VF	25°C	4.0	4.2	4.4	V
LED Forward Current	IF	25°C	30	40	60	mA
EL Power Supply Current	IEF	Veh=110VAC/400Hz	---	---	5.0	mA