


IG19232C Graphic 192x32

Dimension drawing

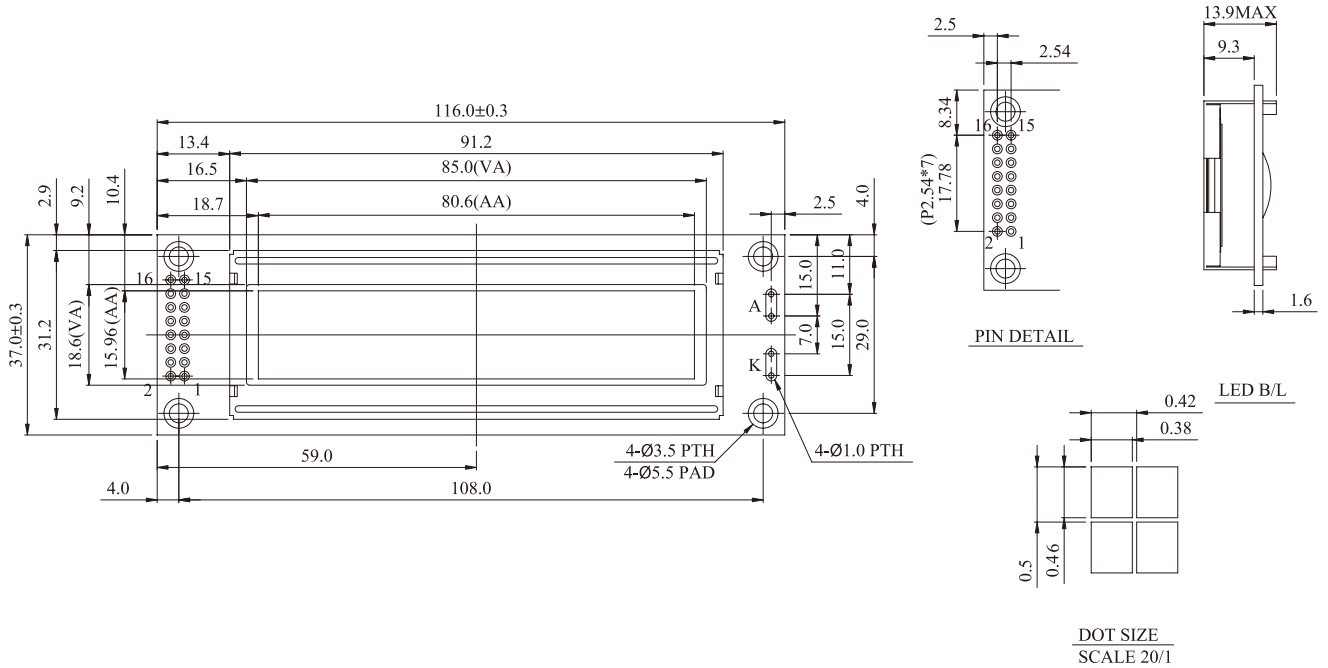

Feature

1. Built in controller (ST7920)
2. +5V power supply
3. 1/32 duty cycle
4. LED can be driver by PIN 15, PIN16
5. Chinese Version
6. Same size with IH2002A

Mechanical Data

Item	Standard Value	Unit
Module Dimension	116.0x37.0	mm
Viewing Area	85x18.6	mm
Dot Size	0.38x0.42	mm
Dot Pitch	0.42x0.51	mm
Mounting hole	108x29	mm

Absolute Maximum Rating

Item	Symbol	Standard Value			Unit
		min.	typ.	max.	
Power Supply	VDD-VSS	4.75	5	5.25	V
Input Voltage	VI	0	---	VDD	V

Note : VSS=0 Volt, VDD=5.0 Volt.

Electronical Characteristics

Item	Symbol	Condition	Standard Value			Unit
			min.	typ.	max.	
Input Voltage	VDD	L level	0.7V _{DD}	---	V _{DD}	V
	VIO	H level	0	---	0.3V _{DD}	V
Supply Current	IDD	VDD=+5V	---	2	---	mA
Recommended LC Driving Voltage for Normal Temp. Version module	Vo-Vss	-20°C	---	---	5.2	V
		0°C	---	---	4.8	
		25°C	---	4.5	---	
		50°C	4.7	---	---	
LED Forward Voltage	VF	25°C	---	4.2	4.6	V
			---	---	---	
LED Forward Current	IF	25°C	---	210	420	mA
EL	IEL	Vel=110vAC;400Hz	---	---	---	mA

Graphic type